Lightly coat front washer surface of Anvil (38) with grease. Place a dab of grease in the Ball holes

and in the hole in the back of the Anvil.

## SERVICE PARTS LIST

Milwankee

SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS REVISED BULLETIN DATE Apr. 2012 55-26-2450 12 Volt Impact Driver WIRING INSTRUCTION STARTING 2450-059 CATALOG NO. **D27B** SEE REVERSE SIDE SERIAL NO.


38

**EXAMPLE:** 0 Component Parts (Small #) **★= Part number change** from previous service parts list. Are Included When Ordering The Assembly (Large #).  $1\frac{2}{3}$ 7 8 9 10  $49\frac{1}{5}$ NOTE: Gear Assembly (28) must be attached to the Motor Assembly (7) prior to installing in Gearcase Assembly (36).  $2\frac{44}{47}$ Service replacement Gear Assembly (28) comes with a motor mount plate that must be removed and discarded when servicing. A Motor Mount Plate (10) already exists on the Motor Assembly (7). (20) (13)(12)(23) (15) (24) (47) (25) (16) (26) (31) (27) (33) (35) NOTE: Pins (13) are shorter than Pins (32). (43) 38 29 30 40 41 42 43 (40) (29) (42) (32) FIG. **LUBRICATION** (Type 'J' Grease, No. 49-08-4220): Coat inside grooves of Bushing (33) with grease. 33 36 33 34

FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.	FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
<b>★</b> 1	31-50-2403	Handle Set	(1)	27		3.0mm Dia. Steel Ball	(29)
2		Left Handle Half	(1)	28	14-29-0190	Gear Assembly	(1)
3		Right Handle Half	(1)	29		Anvil	(1)
4	45-24-0105	Fwd./Rev. Button	(1)	30		3.5mm Steel Ball	(2)
<b>★</b> 5	23-66-1132	Electronics Module Assembly	(1)	31	45-88-0455	Washer	(1)
6	06-82-2385	M2.6 x 14 T-9 Screw	(5)	32	06-65-0085	Pin	(2)
7	23-30-0090	Motor Service Assembly	(1)	33		Sleeve Bearing	(1)
8		Motor	(1)	34		O-Ring	(2)
9		Pinion	(1)	35		Gear Housing	(1)
10		Motor Mount	(1)	36	14-30-0005	Gearcase Assembly	(1)
11		Washer	(2)	37	06-81-0005	M3.5 x 24 Screw	(4)
12		M3 x 6 Screw	(2)	38	45-22-0015	Sleeve and Anvil Assembly	(1)
13	06-65-0075	Pin	(2)	39	45-22-0010	Sleeve and Ball Assembly	(1)
14		Washer	(1)	40		Spring	(1)
15		Ring Gear	(1)	41		Washer	(1)
16	42-70-0055	Clip	(1)	42		Retaining Ring	(1)
17		Planet Gear Set	(8)	43		Sleeve	(1)
18		Sun Gear	(1)	44		LED Label	(1)
19	10-20-0791	Warning Label	(1)	45		Hammer	(1)
20		Carriage	(1)	46		Service Nameplate	(1)
21		Rear Housing	(1)	47		Fuel Gauge LED Assembly	(1)
22		Ball Bearing	(1)	48	42-55-2450	Carrying Case, Optional	(1)
23		Cam Shaft	(1)	<b>★</b> 49	14-46-1705	Handle Set and Switch Assembly	(1)
24		3/16" Dia. Steel Ball	(2)		IV	ILWAUKEE ELECTRIC TOOL COR	PORATION
25		Compression Spring	(1)			13135 W. Lisbon Road, Brookfield	
26		Washer	(1)			10100 TT. Elosoff Roda, Brookhok	Drwg. 1

39 30 40 41 42 43

(37)

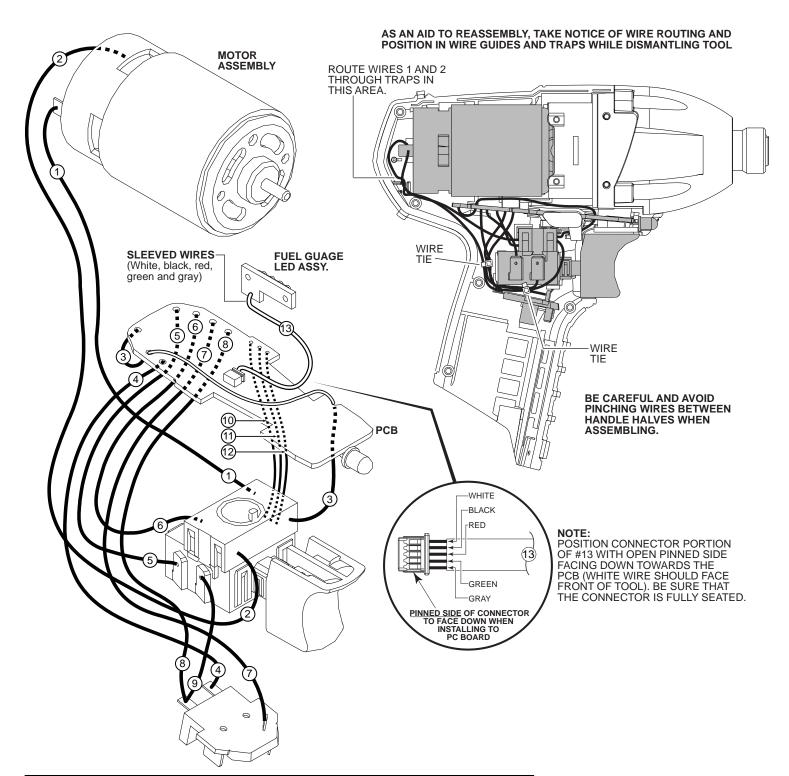

WIRING SPECIFICATIONS								
Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation				
1	Black	23-30-0090		Component of the motor assembly.				
2	Red	23-30-0090		Component of the motor assembly.				
3	White	23-66-1132		Component of the electronics module assembly.				
4	Black	23-66-1132		Component of the electronics module assembly.				
5	Black	23-66-1132		Component of the electronics module assembly.				
6	Red	23-66-1132		Component of the electronics module assembly.				
7	White	23-66-1132		Component of the electronics module assembly.				
8	Red	23-66-1132		Component of the electronics module assembly.				
9	Red	23-66-1132		Component of the electronics module assembly.				
10	Yellow	23-66-1132		Component of the electronics module assembly.				
11	Blue	23-66-1132		Component of the electronics module assembly.				
12	Black	23-66-1132		Component of the electronics module assembly.				
13	Sleeve	23-66-1132		Component of the electronics module assy. / Fuel gauge LED.				